

PORTARO® & EASI-FIT

KIT AND SET SOLUTIONS

DOORS & FRAMES
IN PERFECT HARMONY

vicaima

UNEXPECTED HARMONY



VICAIMA LEADER IN QUALITY DOOR SOLUTIONS

WE HAVE THE EXPERIENCE AND KNOW-HOW THAT YOU NEED...

Vicaima brings a wealth of experience to every project providing door solutions that can exceed expectations and meet the most demanding of requirements. Vicaima doors, frames and associated interior joinery products, are manufactured to the most exacting standards, both in terms of design and performance.

With a reputation for quality and innovation in all things, Vicaima creates specific solutions for homes, apartments, hotels, hospitals, schools and commercial projects alike.

Vicaima Limited, based in Swindon, Wiltshire, provides technical support and expertise to Architects, Developers, Builders and other industry specifiers. With an unrivalled range of both standard and made to order products, Vicaima offers special doors both in size and design, and a multitude of performance options including fire, acoustic and security doors.

Vicaima focus on excellent customer service and have a Custom Fit Centre to tailor standard doors to meet particular customer needs, including glazing, grooving and many other options on short lead times. Vicaima can deliver direct throughout the country or via selected merchant stockist depots.

This Portaro® and Easi-Fit Brochure has been produced to provide professionals, door kit and set solutions that open up numerous possibilities for a wide variety of interior project performance applications. These solutions offer easy and economical on site assembly reducing fitting time, improving consistency and quality of the finished installation.

For further information about Vicaima quality products visit our website www.vicaima.com where you will find details of latest developments and new products. You will also be able to download copies of our various literature and technical data files.

OUR COMPANY HISTORY

Vicaima was founded in 1959 and is currently one of the greatest European players in the design and production of crafted wooden building solutions. Our main products are performance veneered doors (fire resistant, acoustic and security, tested and certified to the highest standards), wardrobes, panelling and other bespoke furniture items. From its home in northern Portugal, the group supplies doors and door sets to more than 25 countries globally.

The Vicaima mission is best summed up as a passion for innovation with quality construction. Its determination to exceed customers expectations in these areas is reflected in Vicaima's achievements in certification and specification, making its timber door and related products highly sought after and widely recognised by specifiers everywhere.

CONTENTS

2 Caring for our world

3 Doors you can trust

4 Portaro® - High-end framing solution

7 Portaro® Fire Door

11 Portaro® SBD

15 Portaro® Acoustic

21 Portaro® Inverse

24 Easi-Fit - Affordable framing solution

26 Easi-fit Non Fire

27 Easi-fit Fire Door

29 Easi-fit SBD

30 Design your door

33 Door Ranges

35 Finishes

36 Configurations & Rebates

37 Dimensions

37 Portaro® and Easi-fit Features

39 Our Joinery Package

40 Projects

CARING FOR OUR WORLD...

THINKING ABOUT TOMORROW

As a responsible and environmentally aware manufacturer, Vicaima promotes the use of technologies and materials which minimize pollution and is focused upon using timber products from renewable and certified forest resources.

Vicaima is certified under the ISO 14001 environmental standard, is a member of the Tropical Forest Trust (TFT), a non-governmental organization (NGO) whose mission is to help companies ensure the responsible management of tropical forests. Vicaima also has available products certified by FSC® (Forest Stewardship Council®), which ensures that they derive from responsibly managed forests and other controlled sources.


All Vicaima doors comply with EU Timber Regulation (EUTR), which prohibits the trade of illegally harvested timber and timber products.

Vicaima promotes awareness campaigns internally of its environmental policy, and engages employees in activity which promote “green attitudes” such as the separation of materials for recycling, minimising waste and electric energy consumption.

Vicaima also invests in a dynamic relationship with the community to which it belongs. Besides its support of local communities, it contributes toward educational projects, charitable groups and non governmental organisations active within society.



The mark of
responsible forestry

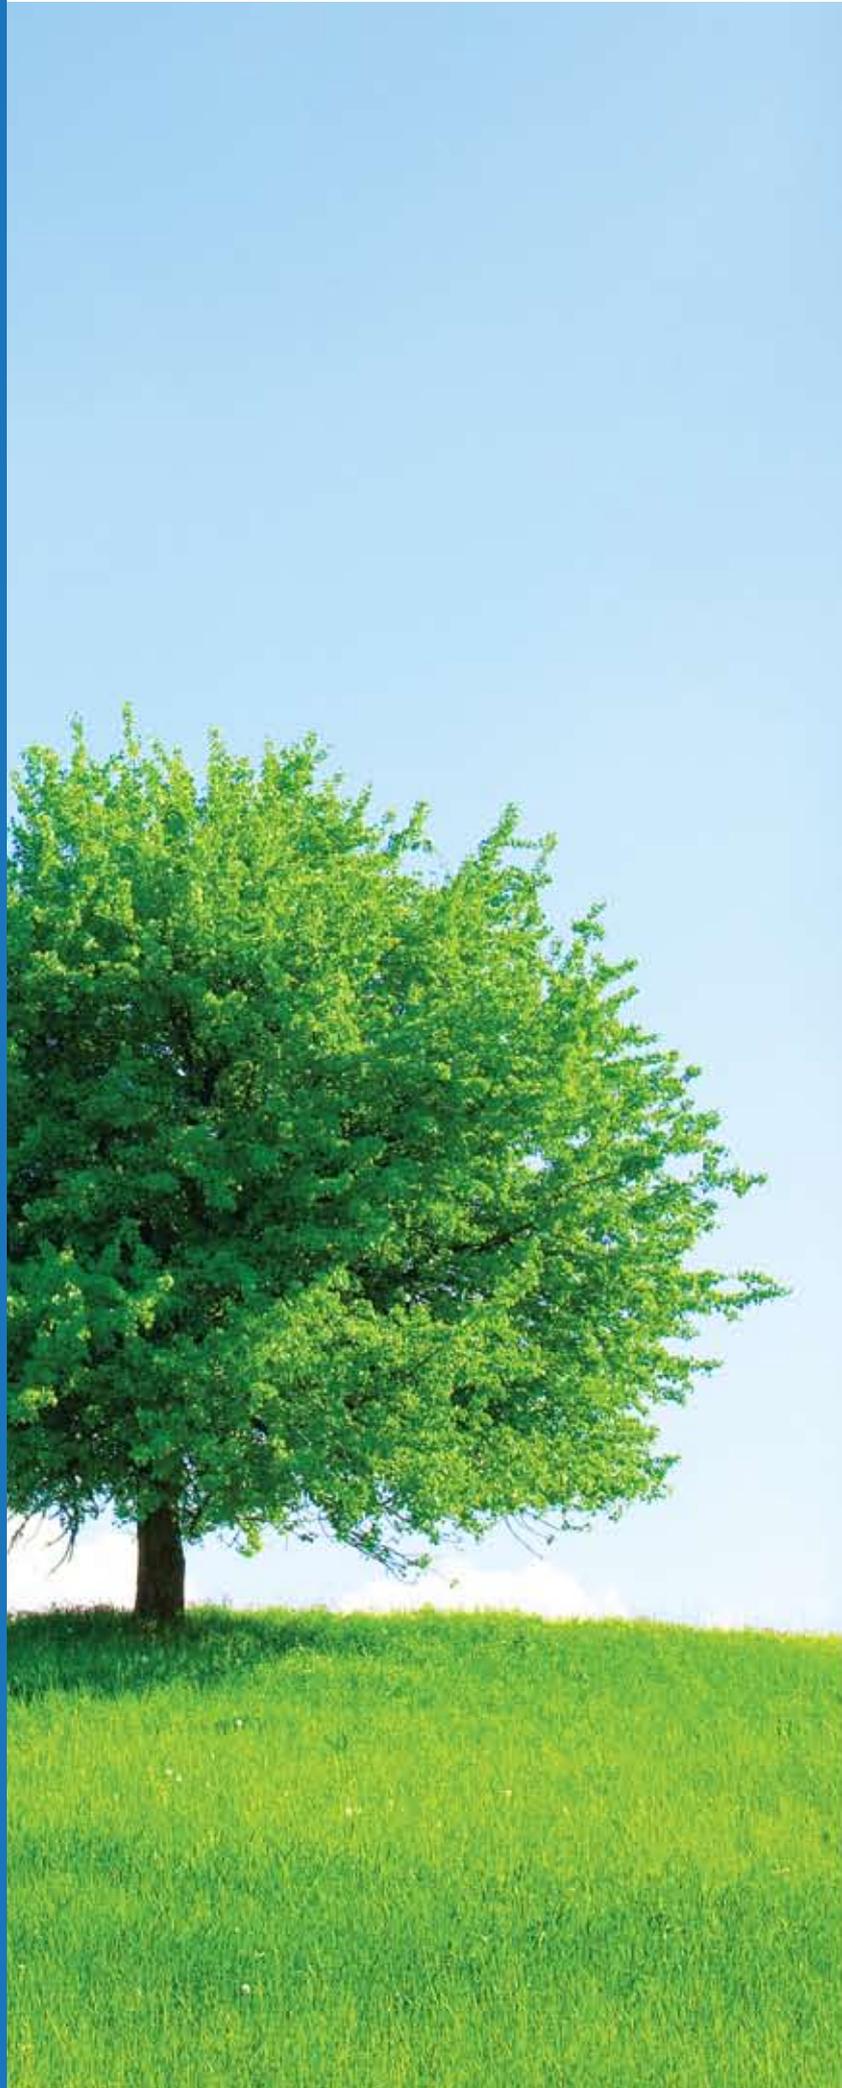

DOORS YOU CAN TRUST...

INNOVATION, QUALITY AND CERTIFICATION

The continuous investment in Research & Development has enabled Vicaima to attain high performance levels which are recognised and certified, according to the most demanding international standards. Vicaima always seeks integrated and innovative solutions capable of meeting the requirements of the various markets.

Vicaima undergoes rigorous quality control to achieve the highest possible quality products and services. This has been recognised with the award of the international quality rating ISO 9001:2008.

Concern for innovation and quality define excellence in production and guarantee the reliability and fitness for purpose of our products. Testing and certification of technical products, such as fire doors, is a continuous process, which includes annual audits within the factory and marketplace, carried out by Q-Mark and Certifire in independent laboratories.

Innovation and creativity is one of the brand's pillars. This vision is reflected in some of its innovative creations, like Haute Couture Collection (luxury doors), Portaro Connect® (door and frame with on-line access control system), Surfaceslab (high performance smart surfaces) or various contemporary door solutions that meets the latest architecture trends.



PORTARO® HIGH-END FRAMING SOLUTION

VERSATILE AND FULLY FINISHED

Portaro® is an unrivalled door system that provides fully finished door, frame, architrave and ironmongery together in one single system.

Versatile and ready to hang, doors and frames are available in a wide range of finishes, creating the perfect harmony between these two pieces.

This concept offers a multitude of door designs and different opening methods, like, sliding, inverse or pivotal doors and excellent performance options of fire, acoustic and security doors. With great flexibility, this is one of the most adaptable systems on the market, suitable for a multitude of locations and applications.

Available as a Kit or Set solution

Door shown is Essential Naturdor® Stained Wenge





Door shown is Essential Dekodor® 3D Grey

PORTARO® FIRE DOOR

CHOOSE VICAIMA WHERE FIRE AND SECURITY COUNTS

Fire Doors play such a crucial role in buildings, both in terms of saving lives and reducing risk to property, and to this end the Vicaima fire door range has been developed to exceed both market and regulatory demands.

All Vicaima Fire Doors in the UK are tested by Chiltern International Fire to BS476 Part 22 (1987) and third party accredited by both the British Woodworking Federation, under the BWF-Certifire scheme and by BM TRADA under the Q-Mark accreditation scheme.

As such, all Vicaima Fire Doors can clearly be identified and recognised by looking for the BWF tamper-evident label and BM TRADA Fire Door plug fitted to the doors, so customers can be doubly sure doors and assemblies are compliant with UK fire door Regulations.

Door kits or sets are available with this performance and all ironmongery components are CE marked and certified for use in Vicaima fire door assemblies. These systems include intumescent seals, smoke seals and/or acoustic seals as options.

To meet the aesthetic demands of the project, Vicaima can provide many factory glazed options, overhead doors and a wide range of designs, veneers and finishes.



Fully tested and approved by independent third party assessment



All fire doors are UK tested by Chiltern International Fire



Approved members of BM TRADA Q-Mark fire door scheme



Approved members of BWF-CERTIFIRE scheme



PORTARO® MK2 FD30(S)

FD30(S) tested door and frame to BS476 Part 22 (1987) by Chiltern International Fire.

Third-party accredited and audited by BM TRADA and BWF Certifire. Compliant with Part B and Part M of the Building Regulations.

DOOR

Overall 44mm thick with solid core in chipboard
Rails and stiles in softwood, vertical edge banded
Facing in MDF or hardboard according with finish

FRAME

Frame in MDF. Jamb 28mm thick
Intumescent strips 15x4mm
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

3 stainless steel CE marked hinges
Standard Latch or Lock
All ironmongery is polished finish

OPTIONS


Factory glazed and openings for transfer grills
Grooves or Inlays
Pairs available with square or rebated meeting stiles
Overpanels, glazed fanlights, unequal pairs
Oversized doors and frames
Intumescent smoke and acoustic seal
Automatic drop seal; Handle

Models and finishes see pages 34 to 36.

Portaro® MK2 FD30(S), is available as a Kit or Set solution, and includes door, frame and ironmongery.

**PORTARO® MK2 IS AVAILABLE IN NON - FIRE
35/40/44mm Hollow core or Solid core
Specification in accordance**


HORIZONTAL CUT

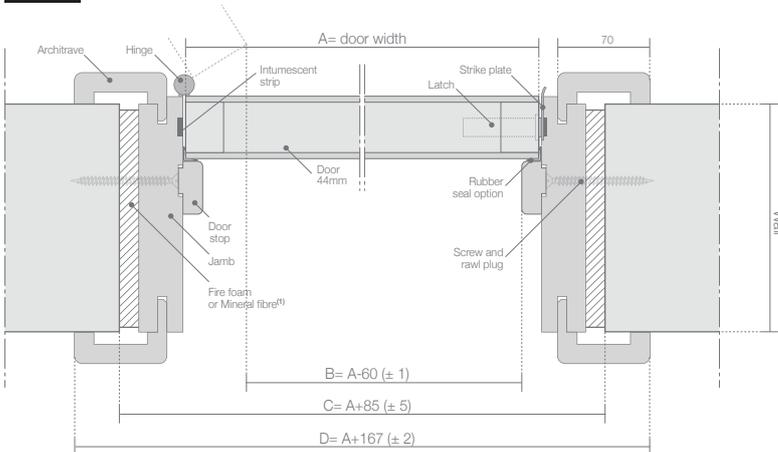


- KEY**
- A - door width / height
 - B - effective clear width⁽¹⁾ / height
 - C - structural opening
 - D - frame total width / height

- Notes:**
- Dimensions in millimeters
 - ⁽¹⁾ For other approved options see BS 8214-2008
 - ⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

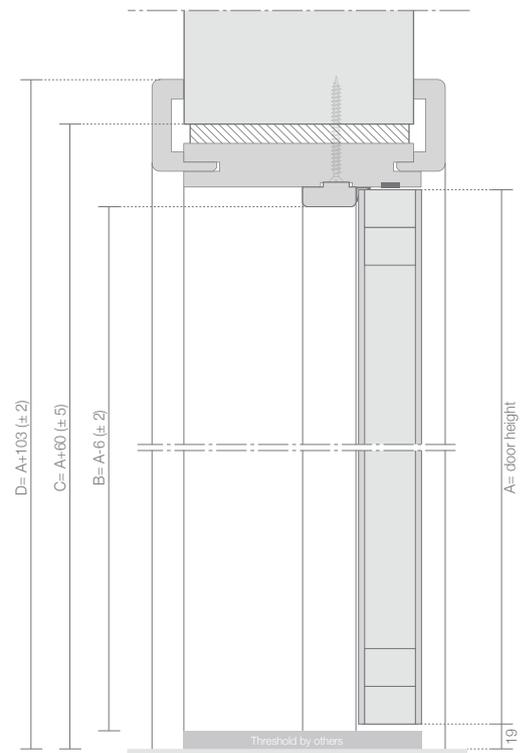

IRONMONGERY

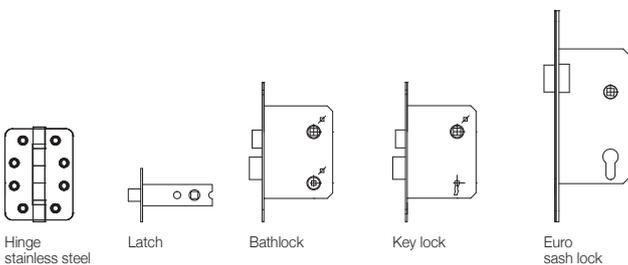



PORTARO® FD60(S)

FD60(S) tested door and frame BS476 Part 22 (1987) by Chiltern International Fire.

Third-party accredited and audited by BM TRADA and BWF Certifire. Compliant with Part B and Part M of the Building Regulations.

DOOR

Overall 54mm thick with multi-layered high density core
Lippings in hardwood all edges, vertical edge banded
Facing produced integral with the core

FRAME

Frame in MR* MDF. Jamb 30mm thick
Double intumescent strips 15x4mm
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

4 stainless steel CE marked hinges
Standard Latch or Lock
All ironmongery is polished finish


OPTIONS

Factory glazed and openings for transfer grills
Inlays
Pairs available with square or rebated meeting stiles
Overpanels, glazed fanlights, unequal pairs
Oversized doors and frames
Intumescent smoke control seal
Instumescent smoke and acoustic seal
Automatic drop seal; Handle

Models and finishes see pages 34 to 36.

Portaro® FD60(S), is available as a Kit solution, and include door, frame and ironmongery. *Moisture Resistant

HORIZONTAL CUT

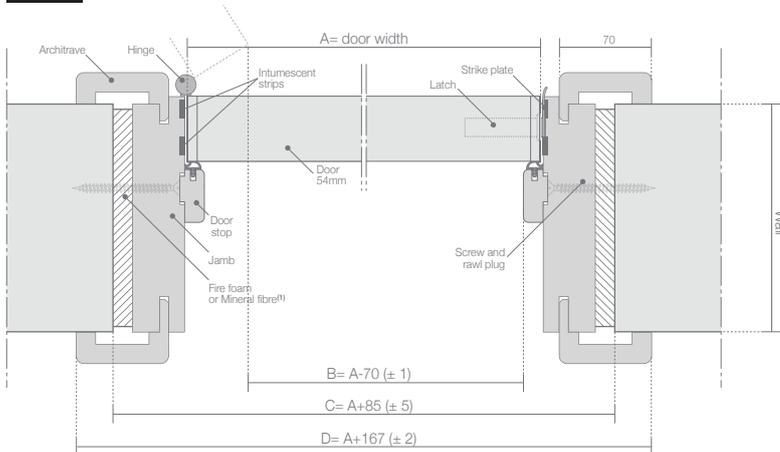


KEY

- A - door width / height
- B - effective clear width⁽¹⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

- Dimensions in millimeters
- ⁽¹⁾ For other approved options see BS 8214-2008
- ⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

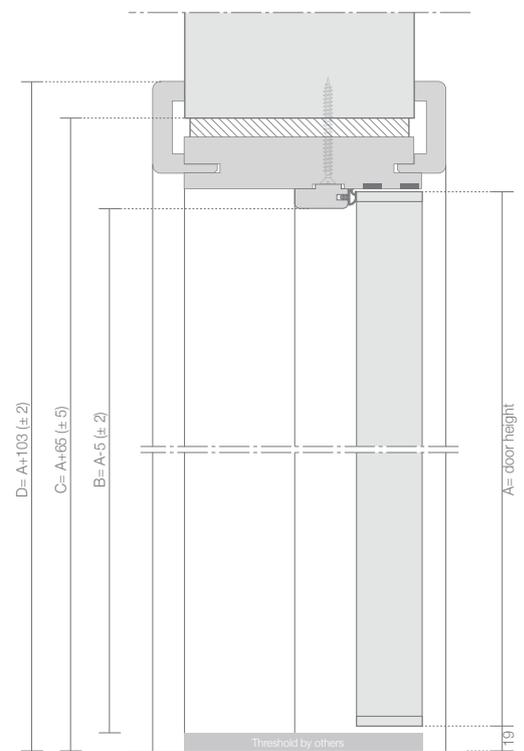

IRONMONGERY

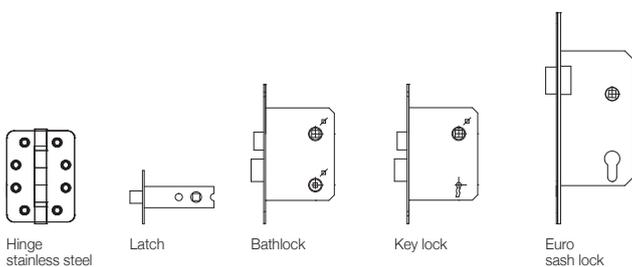



Door shown is Portaro® SBD Essential Naturdor® Oak

PORTARO® SBD

SECURED BY DESIGN

Portaro® Secured By Design is a multifunction internal front entrance door system, which complies with security standards for a wide range of applications typically including apartments and hotel rooms.

Vicaima SBD door kits and sets, offers PAS 23/24 Secured By Design approval, which certifies that it is fit for purpose and that the door, frame, lock and hardware set, has resisted a variety of physical tests which might typically be used during a burglary.

Vicaima Secured By Design solutions comply with building regulations:

- Part B – Fire resistance tested by Chiltern International Fire, to BSEN 1634-1:2008. Supplied as fire resistant with smoke seal to 30 minutes (FD30S) or 60 minutes (FD60S).
- Part M - Designed to accommodate a wide range of structural openings to facilitate accessibility and mobility
- Part E – Product construction and applied accessories, provides acoustic reduction as required by building regulations.
- Increased door size options up to 926mm x 2340mm

What is Secured By Design?

Secured by Design focuses on crime prevention of homes and commercial premises and is the official UK Police flagship initiative supporting the principles of 'designing out crime'.



SECURED BY DESIGN



All fire doors are UK tested by Chiltern International Fire



Approved members of BM TRADA Q-Mark fire door scheme



Approved members of BWF-CERTIFIRE scheme



PORTARO® SBD FD30(S)

SBD FD30(S) tested door and frame by Chiltern International Fire to BS EN 1634-1 (2008) and PAS23/24.

Third-party accredited and audited by BM TRADA. Acoustic 31dB.

Compliant with Part B, M, and Part E of the Building Regulations. Thermal compliant of U-Value 2.1 tested according with EN10077-1.

DOOR

Overall 44mm thick with solid core in high density chipboard
Rails and stiles in softwood, lippings in hardwood, vertical edge banded
Facing in MDF or hardboard according to finish

FRAME

Frame in solid plywood. Jamb 28mm thick
Steel L shaped security strip all around the perimeter of the frame
Intumescent strips 15X4 and intumescent, smoke and acoustic seals 10X4
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

3 security CE marked hinges
3 Point Locking System
All ironmongery is polished finish
Automatic drop seal
Handle; Thumb turn


OPTIONS

Inlays or Grooves
Eye Viewer
Large size option upto 926mmx2340mmx44mm door leaf

Models and finishes see pages 34 to 36.

Portaro® SBD FD30(S), is available as a Kit solution, and includes door, frame and ironmongery.

HORIZONTAL CUT

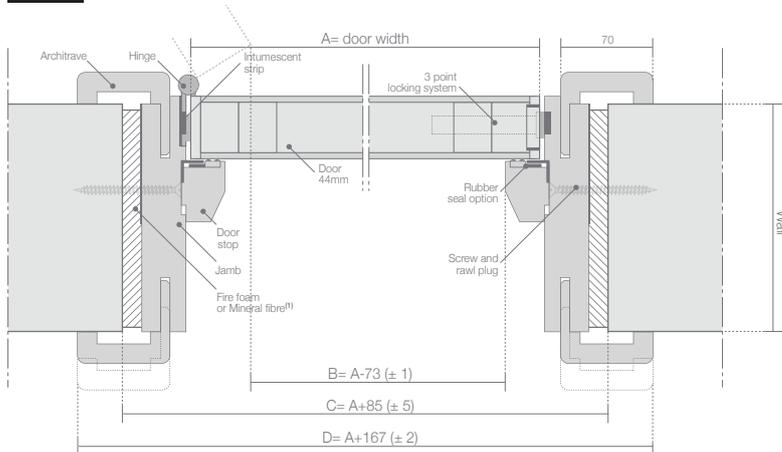


KEY

- A - door width / height
- B - effective clear width⁽²⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

- Dimensions in millimeters
- ⁽¹⁾ For other approved options see BS 8214-2008
- ⁽²⁾ Calculated according to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

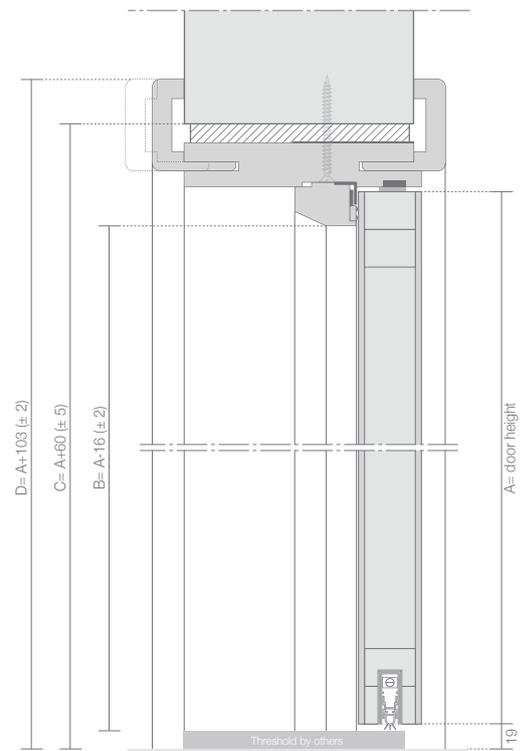

IRONMONGERY

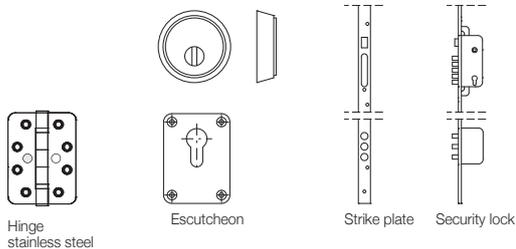



PORTARO® SBD FD60(S)

SBD FD60(S) tested door and frame by Chiltern International Fire to BS EN 1634-1 (2008) and PAS23/24.
Third-party accredited and audited by BM TRADA.
Acoustic 34dB.
Compliant with Part B, M, and Part E of the Building Regulations.

DOOR

Overall 54mm thick with multi-layered high density core
Lippings in hardwood all edges, vertical edge banded
Facing produced integral with the core

FRAME

Architraves in plywood. Jamb in hardwood 35mm thick and frame extension in plywood (optional)
Steel L shaped security strip all around the perimeter of the frame
Double intumescent strips 15X4 and intumescent, smoke and acoustic seals 10X4
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

4 security CE marked hinges
3 Point Locking System
All ironmongery is polished finish
Automatic drop seal
Handle; Thumb turn


OPTIONS

Eye Viewer
Large size option upto 926mmx2326mmx54mm door leaf

Models and finishes see pages 34 to 36.

Portaro® SBD FD60(S), is available as a Kit solution, and includes door, frame and ironmongery.

HORIZONTAL CUT

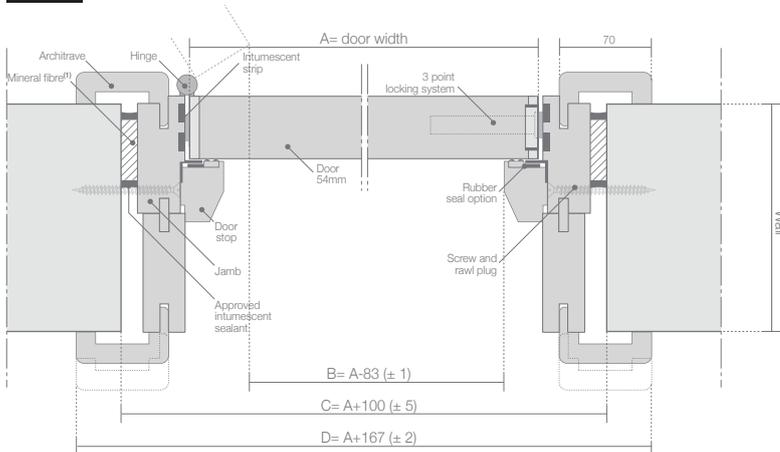


KEY

- A - door width / height
- B - effective clear width® / height
- C - structural opening
- D - frame total width / height


Notes:

- Dimensions in millimeters
- ® For other approved options see BS 8214-2008
- ® Calculated according to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

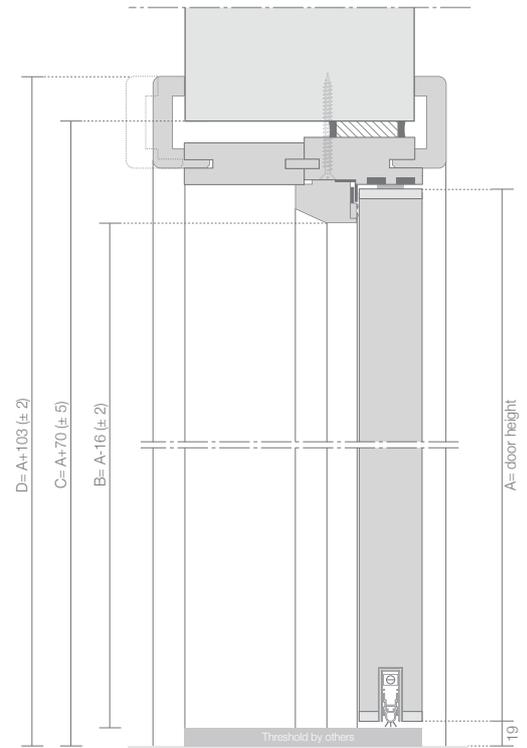

IRONMONGERY

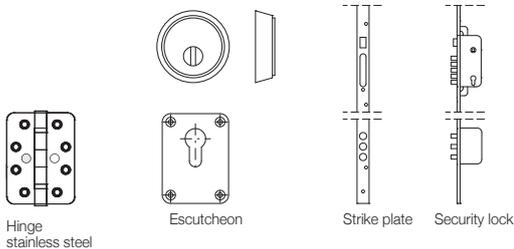



Door shown is Portaro® Essential Naturdor® Walnut

PORTARO® ACOUSTIC

COMFORT WITH A CONTEMPORARY LOOK

Vicaima Acoustic and Fire Resistant Portaro® offer exceptional acoustic and fire attenuation properties, built in to a large range of door kits that perform as well as they look.

Specifically for hotel developments, Vicaima has door solutions with varying levels of acoustic reduction from 33dB to 42dB, contributing to undisturbed comfort for hotel guests. In addition with fire door features we can get a fire resistance of 30 or 60 minutes supporting safety for people and property.

Dependent upon your requirements this system can be specified with single door, double door and room height configurations, with finishes and security options to complement the development. Other special ironmongery and components are also available that can upgrade the product performance and improve aesthetics, such as, invisible concealed door closer and hinges, electronic locks, eye viewer, glazing options and smoke acoustic seals.

Vicaima has unrivalled customer support and a dedicated project team, specialised in producing customised door and furniture solutions to meet specific hotel projects requirements.



All fire doors are UK tested by Chiltern International Fire



Approved members of BM TRADA Q-Mark fire door scheme



Approved members of BWF-CERTIFIRE scheme



PORTARO® FD30 AC33dB

FD30 tested door and frame to BS476 Part 22 (1987) by Chiltern International Fire.

Acoustic insulation to EN ISO 717-1 (2009).

Third-party accredited and audited by BM TRADA and BWF Certifire.

Compliant with Part B, M and Part E of the Building Regulations.

DOOR

Overall 44mm thick with solid core in chipboard
Rails and stiles in softwood, vertical edge banded
Facing in MDF or hardboard according with finish

FRAME

Frame in MDF. Jamb 28mm thick
Intumescent smoke and acoustic seals 15x4mm
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

3 stainless steel CE marked hinges
Standard Latch or Lock
All ironmongery is polished finish
Automatic drop seal


OPTIONS

Recessing for electronic lock
Factory glazed openings
Grooves or Inlays
Pairs and unequal pairs available with 32dB
Oversized doors and frames
Handle

Models and finishes see pages 34 to 36.

Portaro® FD30 AC33dB, is available as a Kit solution, and includes door, frame and ironmongery.

HORIZONTAL CUT

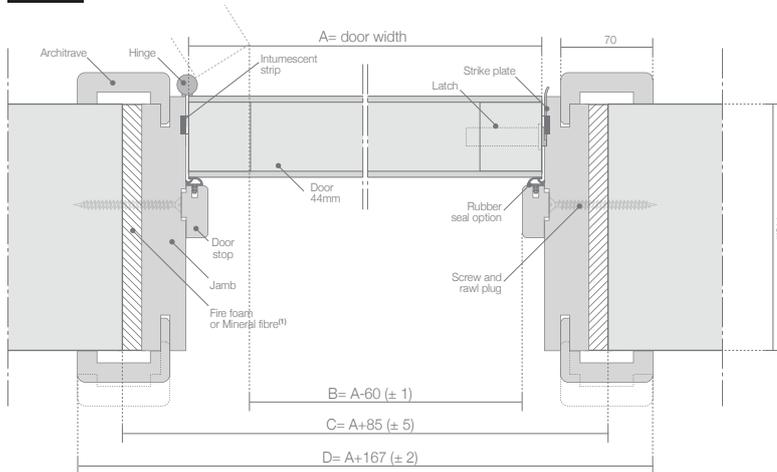


KEY

- A - door width / height
- B - effective clear width⁽¹⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

- Dimensions in millimeters
- ⁽¹⁾ For other approved options see BS 8214-2008
- ⁽²⁾ Calculated according to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

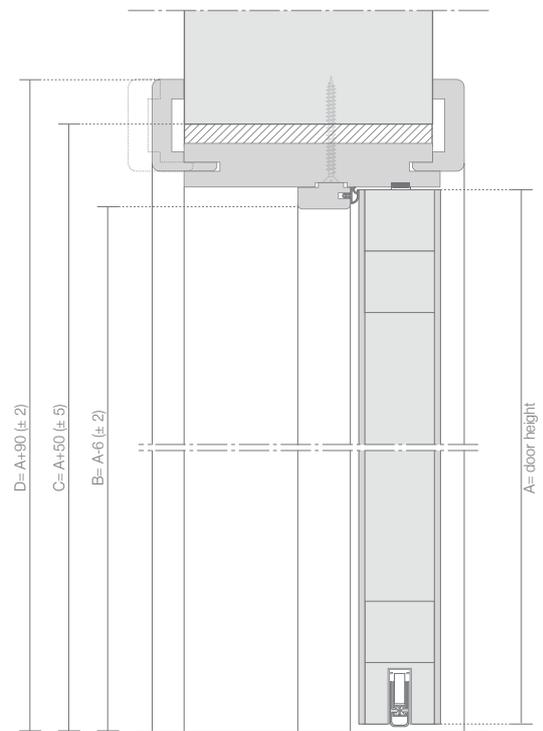

IRONMONGERY





PORTARO® FD30 AC40dB

FD30 tested door and frame to EN 1634-1 (2008) by Afiti-licof.
Acoustic insulation to EN ISO 717-1 (2009).
Compliant with Part B, M and Part E of the Building Regulations.

DOOR

Overall 54mm thick with rebate
Multi-layered acoustic core
Rails and stiles in hardwood, edge banded vertical and top of the door
Facing in MDF

FRAME

Frame in plywood. Jamb 28mm thick
Double rebate with two isolation profiles
Intumescent strips 15x4mm
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

4 stainless steel CE marked hinges
Standard Lock
All ironmongery is polished finish
Automatic drop seal


OPTIONS

Recessing for electronic lock
Veneered inlays
Oversized doors and frames
Handle

Models and finishes see pages 34 to 36.

Portaro® FD30 AC40dB, is available as a Kit solution, and includes door, frame and ironmongery.


HORIZONTAL CUT

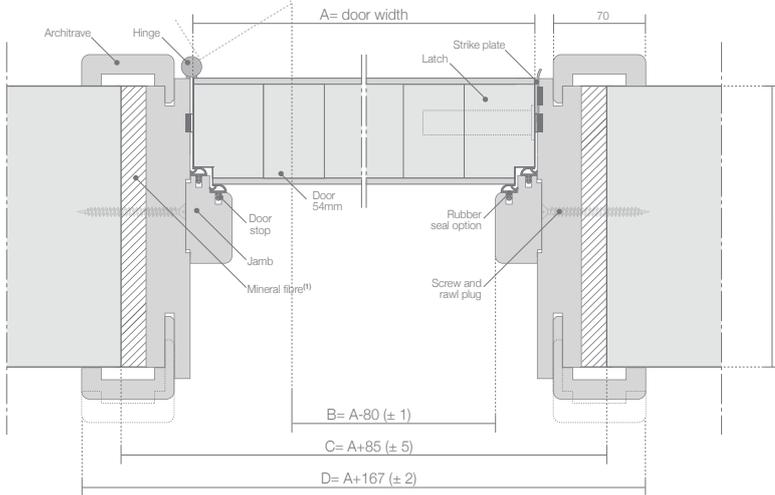


- KEY**
- A - door width / height
 - B - effective clear width⁽¹⁾ / height
 - C - structural opening
 - D - frame total width / height

Notes:
Dimensions in millimeters
⁽¹⁾ For other approved options see BS 8214-2008
⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

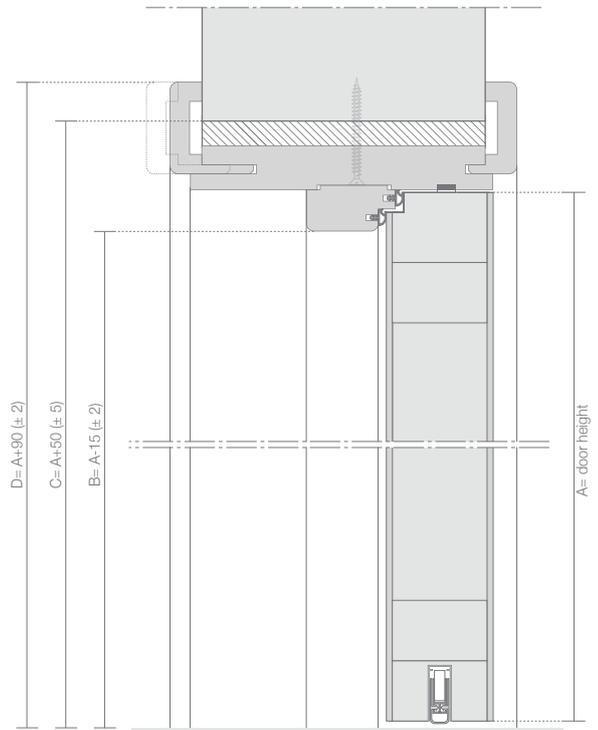

IRONMONGERY





PORTARO® FD30 AC42dB

FD30 tested door and frame to BSEN 1634-1 (2000)
by Chiltern International Fire
Acoustic insulation to EN ISO 717-1 (2009)
Compliant with Part B, M and Part E of the Building Regulations

DOOR

Overall 57mm thick with rebate
Multi-layered acoustic core
Rails and stiles in hardwood
Lippings in hardwood, edge banded vertical and top of the door
Facing in MDF

FRAME

Architraves in plywood. Jamb in hardwood 40mm thick
Intumescent smoke and acoustic seals 15x4mm
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

4 stainless steel CE marked hinges
All ironmongery is polished finish
Automatic drop seal


OPTIONS

Recessing for electronic lock
Veneered inlays
Pairs and unequal pairs available with 41dB certified by Afiti-Licof
Oversized doors and frames
Handle

Models and finishes see pages 34 to 36.

Portaro® FD30 AC42dB, is available as a Kit solution, and includes door, frame and ironmongery.

HORIZONTAL CUT

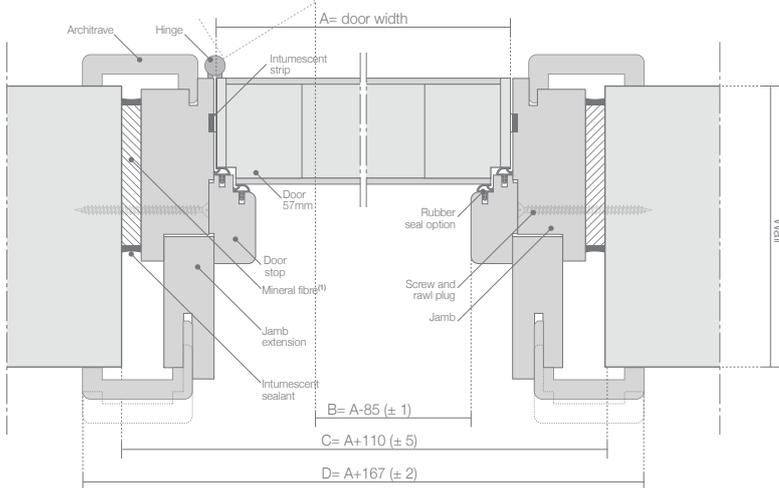


KEY

- A - door width / height
- B - effective clear width⁽¹⁾ / height
- C - structural opening
- D - frame total width / height

Notes:

- Dimensions in millimeters
- ⁽¹⁾ For other approved options see BS 8214-2008
- ⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

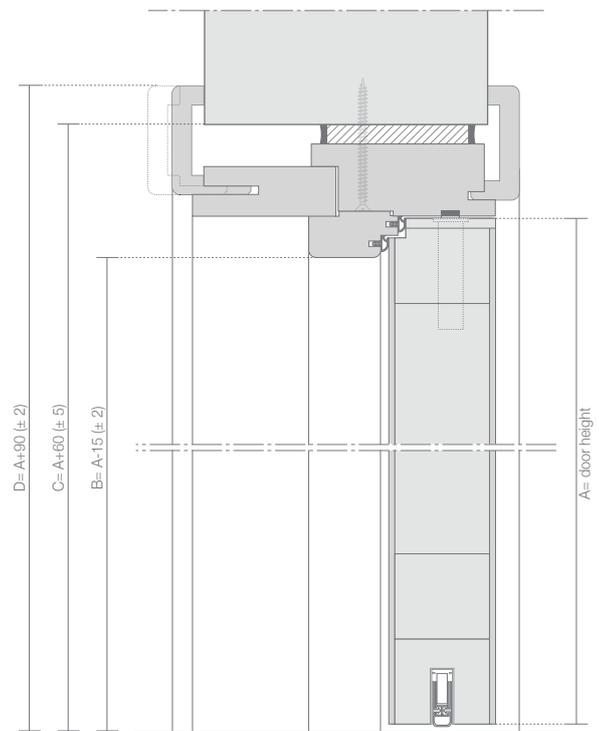

IRONMONGERY



Hinge
stainless steel





PORTARO® FD60 AC34dB

FD60 tested door and frame BS476 Part 22 (1987)
by Chiltern International Fire
Acoustic insulation to EN ISO 717 Part1 (2009)
Third-party accredited and audited by BM TRADA and BWF Certifire
Compliant with Part B, M and Part E of the Building Regulations

DOOR

Overall 54mm thick (doorblank)
Multi-layered high density core
Lippings in hardwood all edges, vertical edge banded
Facing produced integral with the core

FRAME

Frame in MR* MDF. Jamb 30mm thick
Double intumescent, smoke and acoustic seals 15x4mm
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

4 stainless steel CE marked hinges
Standard Lock
All ironmongery is polished finish
Automatic drop seal

OPTIONS


Factory glazed openings
Inlays
Pairs available with 33dB
Handle

Models and finishes see pages 34 to 36.

Portaro® FD60 AC34dB, is available as a Kit solution, and includes door, frame and ironmongery.

*Moisture Resistant

HORIZONTAL CUT

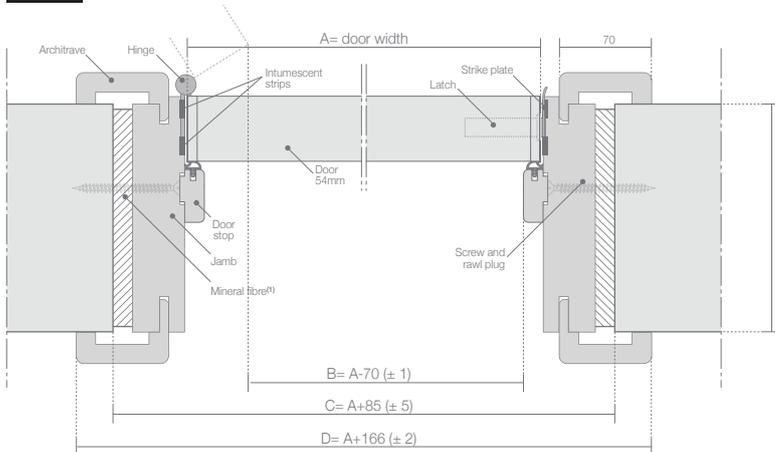


KEY

- A - door width / height
- B - effective clear width⁽¹⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

- Dimensions in millimeters
- ⁽¹⁾ For other approved options see BS 8214-2008
- ⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

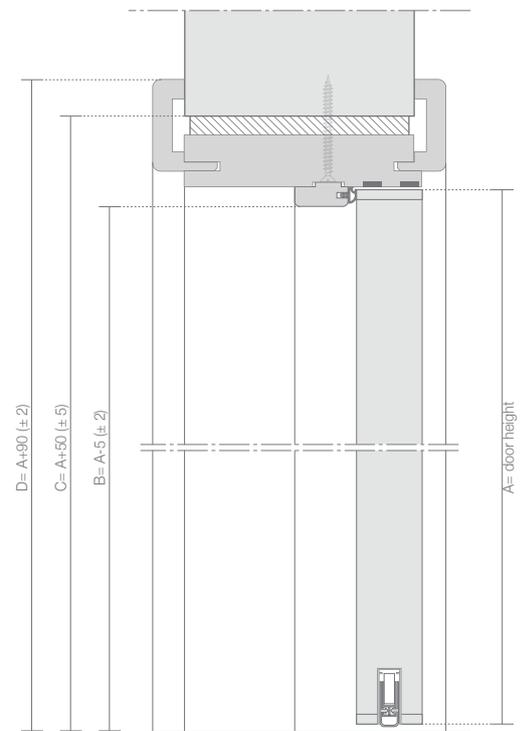

IRONMONGERY



Hinge stainless steel

Euro sash lock





Door shown is Portaro® Inverse Essential Naturdor®

PORTARO® INVERSE

SIMPLICITY WITH DESIGN

Vicaima's outstanding Portaro® Inverse complete door and frame system, has design and performance features which makes this unrivalled contemporary solution an exciting prospect for interior designers and specifiers.

This distinctive system can be supplied with room height dimensions creating a dramatic and beautiful appearance. It can be further enhanced by seamlessly integrating the door – using invisible hinges - into full wall-width panels, to give a stunning contemporary 'panoramic' look.

A wide range of finishes are available giving designers a broad spectrum to choose from. This offers considerable design potential whether using veneers or colourful laminates matching as you wish with interior soft furnishings or wall coverings. The door system can complement or contrast as needed.

If fire protection is required, these doors can be supplied as FD30 certified by Chiltern International Fire.



All fire doors are UK tested by Chiltern International Fire



Approved members of BM TRADA Q-Mark fire door scheme



Approved members of BWF-CERTIFIRE scheme

PORTARO® INVERSE

DOOR

Overall 47mm thick with rebate
Hollow core or solid core
Rails and stiles in softwood, edge banded vertical and top of the door
Facing in MDF

FRAME

Frame in plywood. Jamb 28mm thick
Adjustable architrave with 70mm width (interior) and 80mm (exterior)

IRONMONGERY & OTHERS

3 stainless steel CE marked hinges
Standard Latch or Lock
All ironmongery is polished finish

OPTIONS

Headless frame available
Factory glazed and openings for transfer grills
Grooves or Inlays
Pairs and unequal pairs available with square or rebated meeting stiles
Oversized doors and frames
Invisible hinges
Doors can be integrated into full wall panels
Handle


Models and finishes see pages 34 to 36.

Portaro® Inverse, is available as a Kit solution, and includes door, frame and ironmongery..



Headless frame available as option

HORIZONTAL CUT

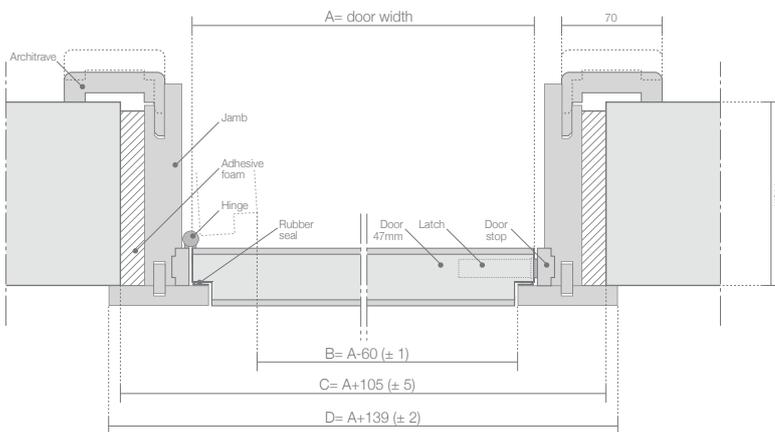


KEY

- A - door width / height
- B - effective clear width⁽¹⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

- ⁽¹⁾ Dimensions in millimeters
- ⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

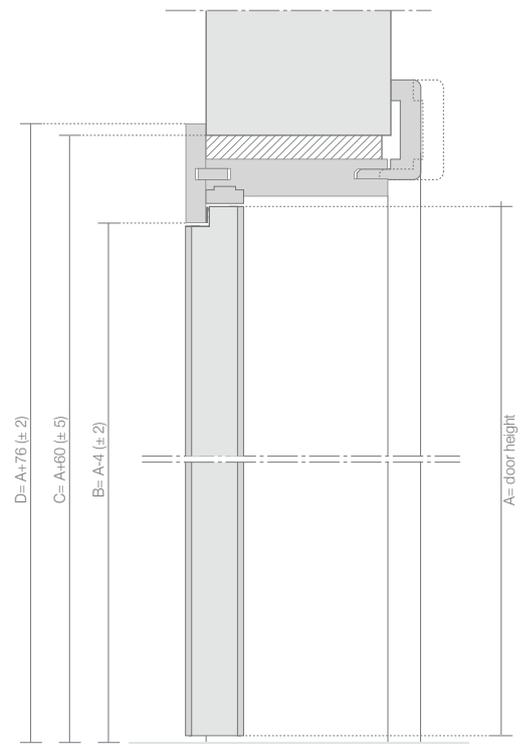

IRONMONGERY

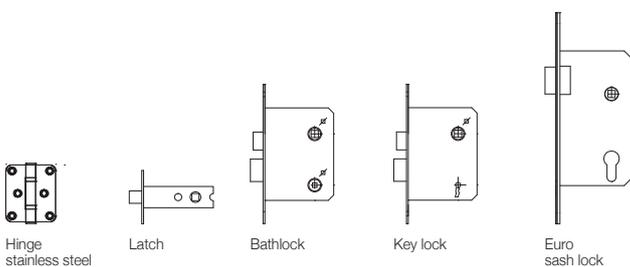



PORTARO® INVERSE FD30

FD30 tested door and frame to BS476 Part 22 (1987)
by Chiltern International Fire
Compliant with Part B and Part M of the Building Regulations

DOOR

Overall 47mm thick with rebate
Solid core in chipboard
Rails and stiles in softwood, edge banded vertical and top of the door
Facing in MDF

FRAME

Frame in plywood. Jamb 28mm thick
Intumescent strips 15x4mm
Adjustable architrave with 70mm width

IRONMONGERY & OTHERS

3 stainless steel CE marked hinges
Standard Latch or Lock
All ironmongery is polished finish


OPTIONS

Recessing for electronic lock
Veneered inlays
Oversized doors
Automatic drop seal
Doors can be integrated into full wall panels
Handle

Models and finishes see pages 34 to 36.

Portaro® Inverse FD30, is available as a Kit solution, and includes door, frame and ironmongery.

HORIZONTAL CUT

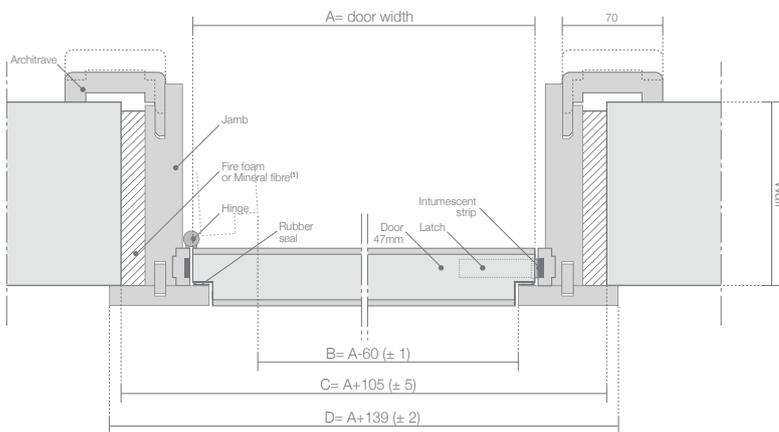


KEY

- A - door width / height
- B - effective clear width⁽²⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

- Dimensions in millimeters
- ⁽¹⁾ For other approved options see BS 8214-2008
- ⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

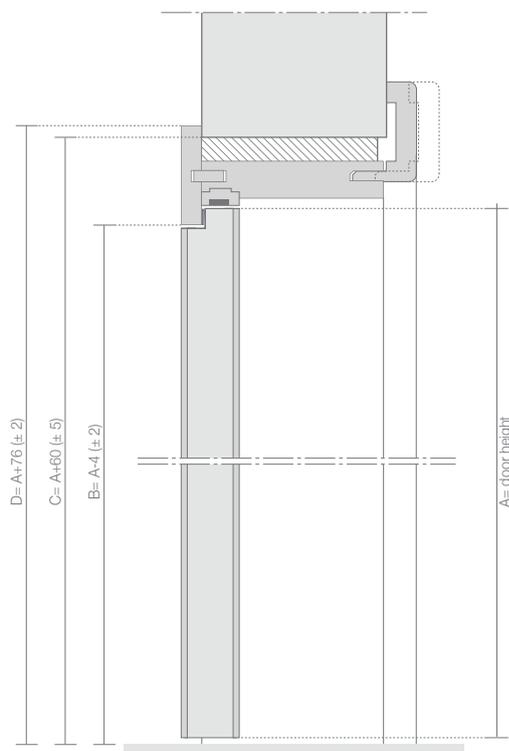

IRONMONGERY

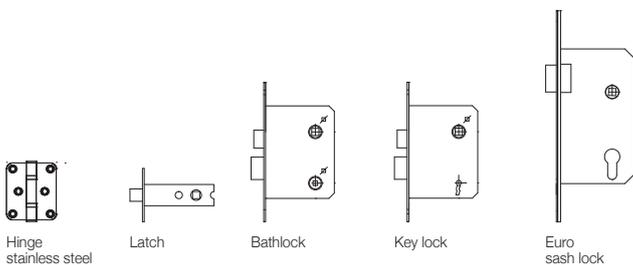

EASI-FIT AFFORDABLE FRAMING SOLUTION

SIMPLE AND EASY

Easi-fit is a rapid build interior door system, which combines door, a ready-primed frame, architrave, and essential ironmongery in one package, offering major time and cost saving as well as a consistent quality.

Easi-fit door systems have a number of finishes, a choice of designs and various lock and latch options, together with complimentary architrave and skirting.

Fire and Security options are also available within the Easi-fit range and can be supplied in FD30 or FD60 certified fire options. SBD approved FD30S fire rated Easi-fit sets are available with PAS 23/24 performance.

Available as a Kit or Set solution

Door shown is Essential Dekordor® White





EASI-FIT NON-FIRE

DOOR

Overall 35, 40 or 44mm thick
 Hollow core or solid core
 Rails and stiles in softwood
 Complementary lippings in hardwood to vertical edges
 Facing in MDF or hardboard according with finish

FRAME

Frame in white primed MR* MDF
 Non adjustable architraves. As option one architrave can be adjustable
 Architraves with 44 or 69mm width

IRONMONGERY & OTHERS

3 stainless steel CE marked hinges
 Standard Latch or Lock
 All ironmongery is polished finish

OPTIONS


Frame also available in white primed redwood
 Glazed openings
 Grooves or Inlays
 Pairs available with square meeting stiles
 Pairs available with rebated meeting stiles for 44mm thick doors
 Overpanels, glazed fanlights, unequal pairs
 Oversized doors and frames
 Handle

Models and finishes see pages 34 to 36.

Available as a Kit or Set solution.

*Moisture Resistant

HORIZONTAL CUT

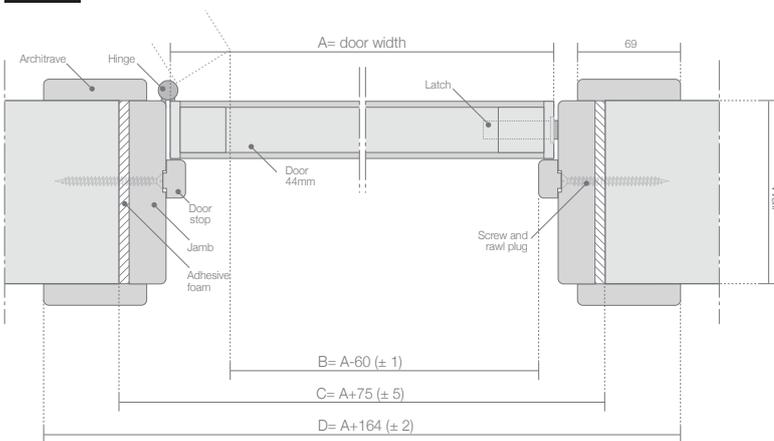


KEY

- A - door width / height
- B - effective clear width⁽²⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

Dimensions in millimeters
⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

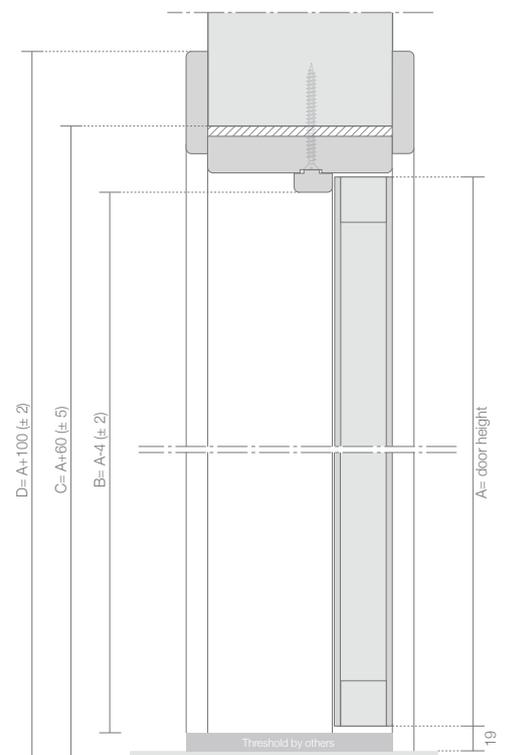

IRONMONGERY

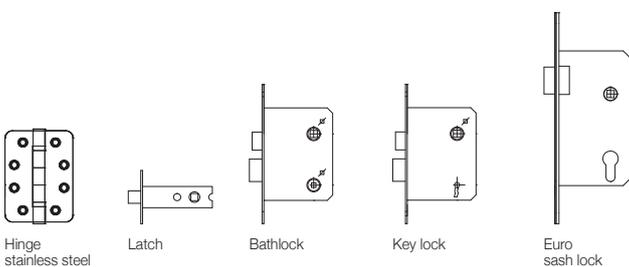



EASI-FIT FD30(S)

FD30S tested door and frame to BS476 Part 22 (1987)
by Chiltern International Fire
Third-party accredited and audited by BM TRADA and BWF Certifire
Compliant with Part B and Part M of the Building Regulations

DOOR

Overall 44mm thick with solid core in chipboard. Rails and stiles in softwood. Complementary lippings in hardwood to vertical edges
Facing in MDF or hardboard according with finish

FRAME

Frame in white primed MR* MDF
For higher thicker walls an extension piece can be applied at the jamb
Intumescent strips 15x4mm
Non adjustable architraves. As option one architrave can be adjustable
Architraves with 44 or 69mm width

IRONMONGERY & OTHERS

3 stainless steel CE marked hinges
Standard Latch or Lock
All ironmongery is polished finish


OPTIONS

Frame also available in white primed redwood
Factory glazed and openings for transfer grills
Grooves or Inlays
Pairs and unequal pairs available with square or rebated meeting stiles
Oversized doors and frames
Intumescent smoke control seal or intumescent smoke and acoustic seal
Automatic drop seal; Handle

Models and finishes see pages 34 to 36.

Available as a Kit or Set solution. *Moisture Resistant

HORIZONTAL CUT

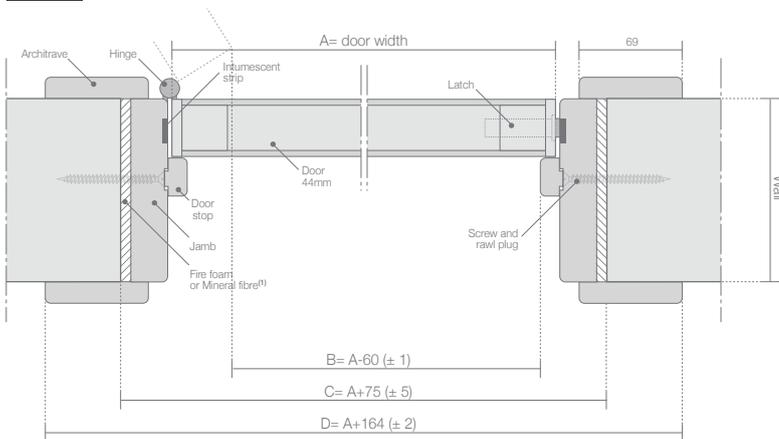


KEY

- A - door width / height
- B - effective clear width⁽¹⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

- Dimensions in millimeters
- ⁽¹⁾ For other approved options see BS 8214-2008
- ⁽²⁾ Calculated according to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

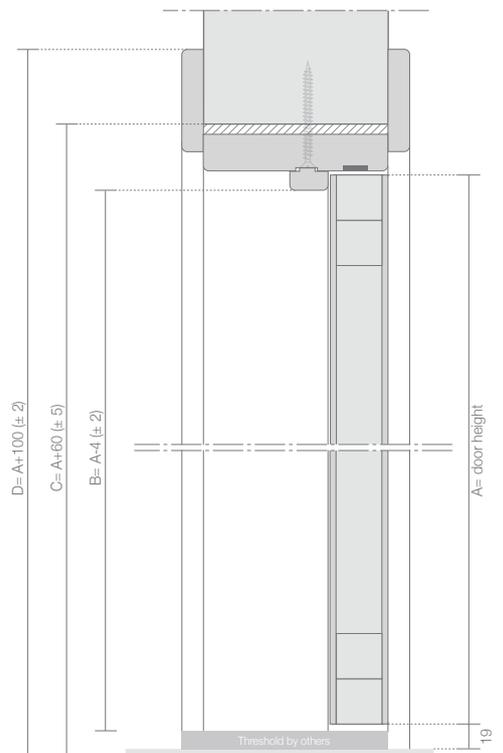

IRONMONGERY

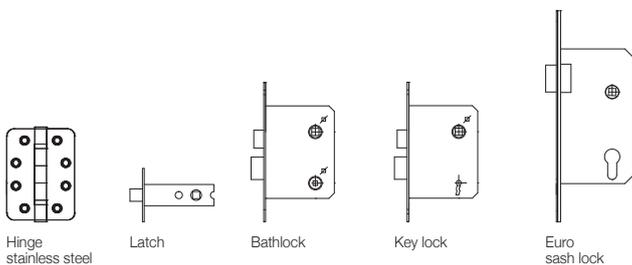



EASI-FIT FD60(S)

FD60(S) tested door and frame BS476 Part 22 (1987) by Chiltern International Fire

Third-party accredited and audited by BM TRADA and BWF Certifire
Compliant with Part B and Part M of the Building Regulations

DOOR

Overall 54mm thick with multi-layered high density core
Complementary lippings in hardwood all edges
Facing produced integral with the core

FRAME

Frame in white primed MR* MDF. Jamb 30mm thick
Double intumescent strips 15x4mm
Non adjustable architraves. As option one architrave can be adjustable
Architraves with 44 or 69mm width

IRONMONGERY & OTHERS

4 stainless steel CE marked hinges
Standard Lock
All ironmongery is polished finish

OPTIONS


Factory glazed and openings for transfer grills
Inlays
Pairs and unequal pairs available with square or rebated meeting stiles
Oversized doors and frames
Intumescent smoke control seal
Instumescent smoke and acoustic reduction seal
Automatic drop seal; Handle

Models and finishes see pages 34 to 36.

Available as a Kit and Set solution.

*Moisture Resistant

HORIZONTAL CUT

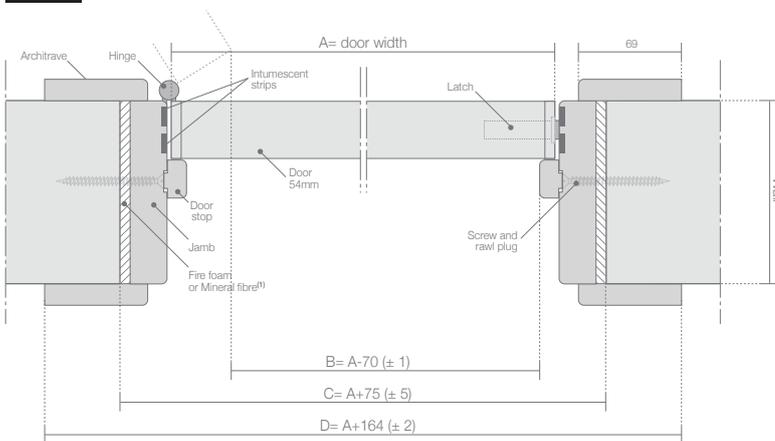


KEY

- A - door width / height
- B - effective clear width⁽¹⁾ / height
- C - structural opening
- D - frame total width / height


Notes:

- Dimensions in millimeters
- ⁽¹⁾ For other approved options see BS 8214-2008
- ⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

VERTICAL CUT

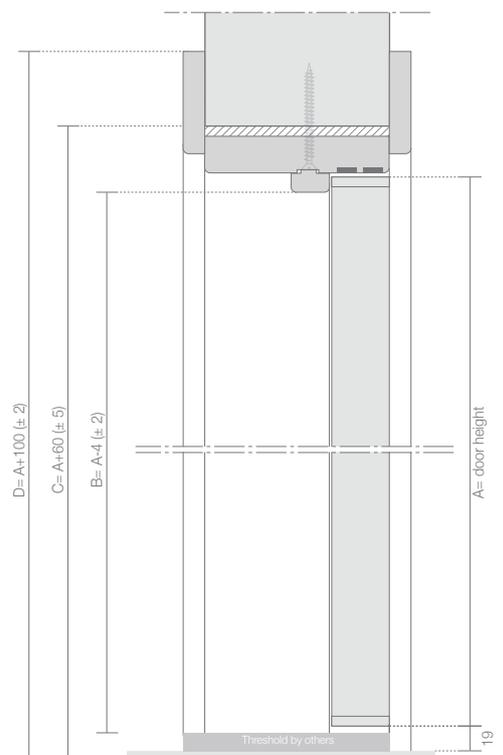

IRONMONGERY

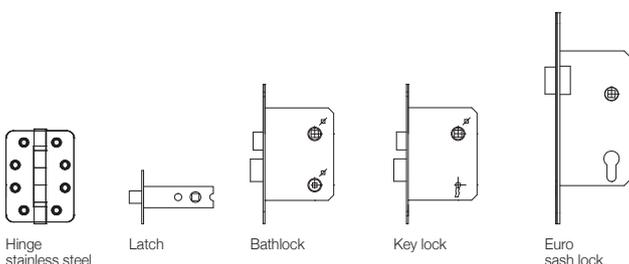



EASI-FIT SBD30(S)

SBD FD30 tested door and frame and Acoustic 31dB
 Tested by Exova to BS476 Part 22 (1987) and PAS23/24
 Third-party accredited and audited by BM TRADA and BWF Certifire
 Compliant with Part B, M, and Part E of the Building Regulations
 Thermal compliant of U-Value 2 tested according with EN10077-1
 Durability to DD171 and BD EN 1192 Severe Duty Rating
 Fully assembled doorset

DOOR

Overall 44mm thick with solid core in high density chipboard
 Rails, stiles in softwood
 Complementary lippings in hardwood to vertical edges
 Facing in MDF or hardboard according with finish

FRAME

No architraves
 Jamb in solid white primed hardwood 88mmx55mm with 17mm deep rebate
 Intumescent, smoke and acoustic seals

IRONMONGERY & OTHERS

3 Security CE marked hinges
 3 Point Locking System
 All ironmongery is polished finish
 Automatic drop seal
 Oak hardwood threshold
 Handle


OPTIONS

Inlays, Eye Viewer, Letter plate, Door closer, Concealed closer


Models and finishes see pages 34 to 36.

Available as a Set solution only.

HORIZONTAL CUT

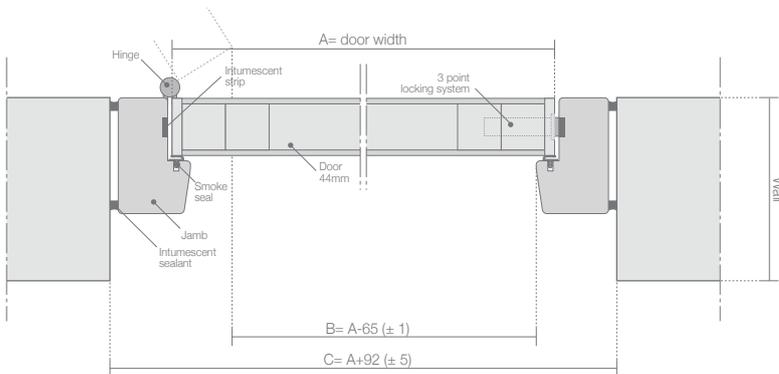




VERTICAL CUT

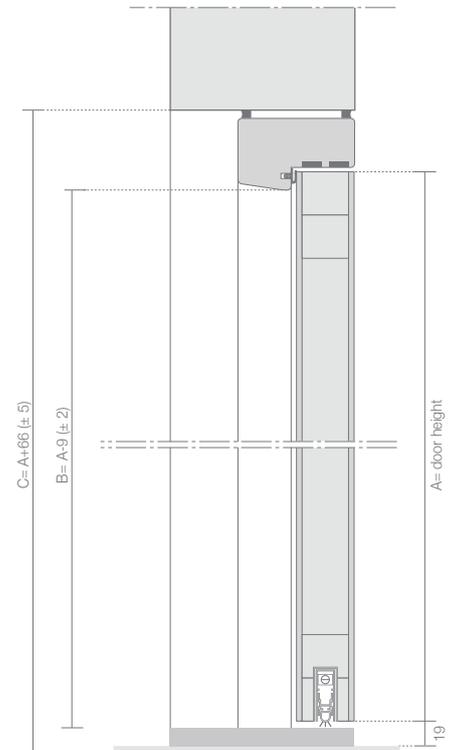

- KEY**
 A - door width / height
 B - effective clear width⁽²⁾ / height
 C - structural opening
 D - frame total width / height

Notes:
 Dimensions in millimeters
⁽²⁾ Calculated accordingly to Building Regulation Part M, but excluding the handle dimension

IRONMONGERY



DESIGN YOUR DOOR

- DOOR RANGES
- FINISH OPTIONS
- CONFIGURATIONS
- DIMENSIONS
- FEATURES

Door shown is Essential Dekordor® 3D Black



CONTEMPORARY DESIGNS



DOOR RANGES

See more models at www.vicaima.com

CREATIVE

New door range with a singular aesthetic, where the details makes the difference. To inspire your creativity!

New!



EX 15.0/03



EX 15.2/03



EX 15.3/03



EX 15.4/03



EX 15.5/03

EXCLUSIVE

Blending cross directional veneers and contrasting inlays to make a truly modern décor.



EX 10.2/00



EX 6.0/15T



EX 5.0/15T



EX 5.0/03

ESSENTIAL

Flush doors in a wide selection of finishes, grain direction, face grooving or aperture shape. Pure simplicity in design!



Vertical



Horizontal



PG4H



PG3P



PG2V5H

CLASSIC

These doors combine the beauty of natural wood veneers with panels which feature distinct design and attractive glazing options.



K3100



K3400



P2200



P2600



P2000

STUNNING FINISHES

FROM VICAIMA

INNOVATIVE STYLING
SUPERB QUALITY
EXCEPTIONAL CHOICE



FINISHES


NATURDOR® REAL WOOD VENEER Natural wood grain configuration that creates striking patterns for door design.




NATURDOR® STRAIGHT LINE Real veneers with perfect match.




NATURDOR® CROWN LINE Real veneers with perfect match.

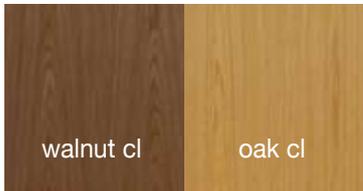

DEKORDOR® HD Laminate finish, which is hard wearing and scratch resistant. Ideal for more demanding locations.

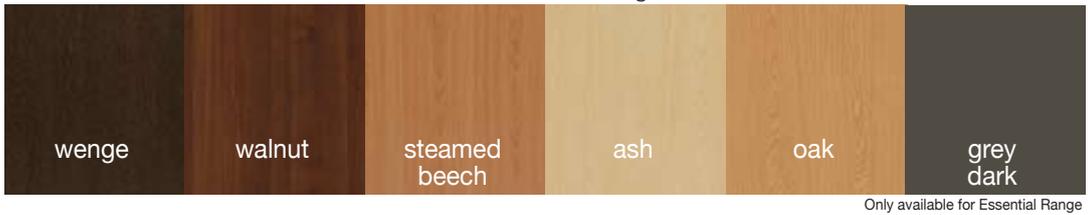


DEKORDOR® SD Foil finish that ensures a totally consistent colour and grain.

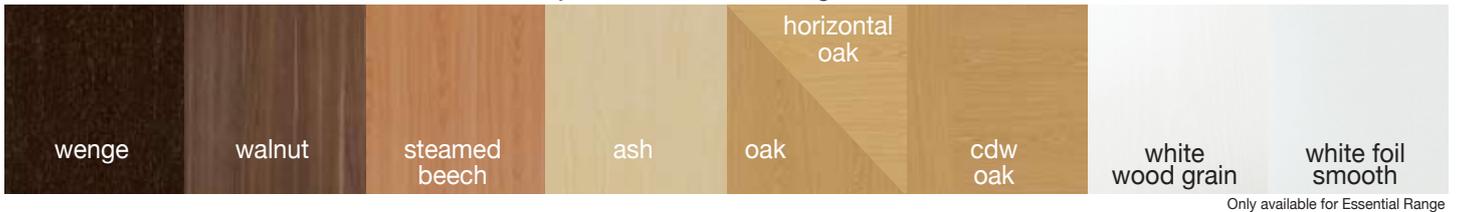

DEKORDOR® 3D Environmentally friendly, this finish brings a new dimension to door design with striking embossed effects.



LACDOR Stunning white doors that create a smooth canvas for every colour scheme

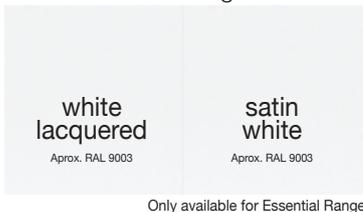

STAINED FINISHES AVAILABLE!

Combining colour and grain effect, vicaima stained doors give a complete spectrum of opportunities.

FOR MORE INFORMATION PLEASE CONTACT

 01793 532333


CONFIGURATION & REBATES

Vicaima doors are available with many possibilities and variations. However if you wish to discuss a particular design requirement please call our sales team for assistance.


CONFIGURATION OPTIONS



OPENING DIRECTION

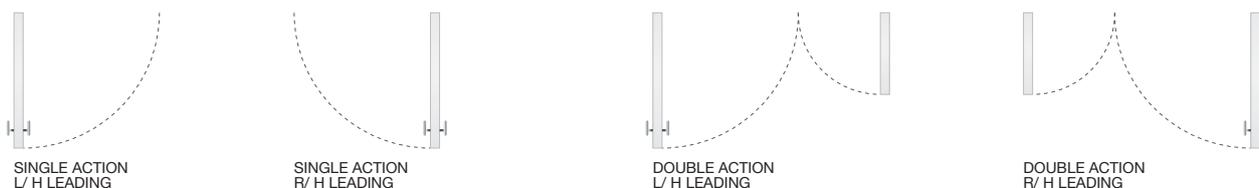

REBATES



DIMENSIONS & SPECIAL SIZES

Vicaima stock a very wide range of both metric and imperial sizes, suitable for both the UK and Irish markets. In addition to which non-standard dimensions can be accommodated to special order, subject to minimum order requirements.

SPECIAL SIZES

With great flexibility our Kit and Set solutions, can be supplied to a height of 2700mm to give full floor to ceiling height.

CALL US FOR MORE INFORMATION

 **01793 532333**

UK IMPERIAL SIZES

- 914 x 1981mm (3'0" x 6'6")
- 864 x 1981mm (2'10" x 6'6")
- 838 x 1981mm (2'9" x 6'6")
- 813 x 2032mm (2'8" x 6'8")
- 762 x 1981mm (2'6" x 6'6")
- 686 x 1981mm (2'3" x 6'6")
- 610 x 1981mm (2'0" x 6'6")
- 533 x 1981mm (1'9" x 6'6")
- 457 x 1981mm (1'6" x 6'6")
- 381 x 1981mm (1'3" x 6'6")

IRELAND IMPERIAL SIZES

- 914 x 2032mm (3'0" x 6'8")
- 864 x 2032mm (2'10" x 6'8")
- 813 x 2032mm (2'8" x 6'8")
- 762 x 1981mm (2'6" x 6'6")
- 711 x 1981mm (2'4" x 6'6")
- 660 x 1981mm (2'2" x 6'6")
- 610 x 1981mm (2'0" x 6'6")

UK & IRELAND METRIC SIZES

- 1026 x 2040mm
- 926 x 2040mm
- 826 x 2040mm
- 726 x 2040mm
- 626 x 2040mm
- 526 x 2040mm
- 426 x 2040mm
- 326 x 2040mm

SPECIAL SIZES	MAXIMUM WIDTH - 1200mm	MAXIMUM HEIGHT - 2700mm
	MINIMUM WIDTH - 326mm	MINIMUM HEIGHT - 1500mm


FEATURES

	PORTARO®			EASI-FIT		
	Core - Door Thickness	Glazing Options	Configuration Options	Core - Door Thickness	Glazing Options	Configuration Options
Non-Fire	Hollow core - 35/40/44mm	Yes	2 leaves, Unequal pairs Overpanels, Glazed fanlights	Hollow core - 35/40/44mm	Yes	2 leaves, Unequal pairs Overpanels, Glazed fanlights
	Solid core - 35/40/44mm	Yes		Solid core - 35/40/44mm	Yes	
FD30	Solid core - 44mm	Yes	2 leaves, Unequal pairs Overpanels, Glazed fanlights	Solid core - 44mm	Yes	2 leaves and unequal pairs
	Heavy Duty core - 44mm	Yes		-	-	
FD60	Solid core - 54mm	Yes	2 leaves, Unequal pairs Overpanels, Glazed fanlights	Solid core - 54mm	Yes	2 leaves and unequal pairs
SBD FD30 31dB	Solid core - 44mm	-	-	Solid core - 44mm	-	-
SBD FD60 34dB	Solid core - 54mm	-	-	-	-	-
FD30 AC33dB	Solid core - 44mm	Yes	2 leaves available in FD30 AC32dB	-	-	-
FD30 AC40dB	Solid core - 54mm	-	-	-	-	-
FD30 AC42dB	Solid core - 57mm	-	2 leaves available in FD30 AC41dB	-	-	-
FD60 AC34dB	Solid core - 54mm	Yes	2 leaves available in FD60 AC33dB	-	-	-
Inverse Non-Fire	Hollow core - 47mm	Yes	2 leaves, Unequal pairs Overpanels	-	-	-
	Solid core - 47mm	Yes		-	-	-
Inverse FD30	Solid core - 47mm	-	-	-	-	-



Door shown is Essential White Lacquered

OUR JOINERY PACKAGE

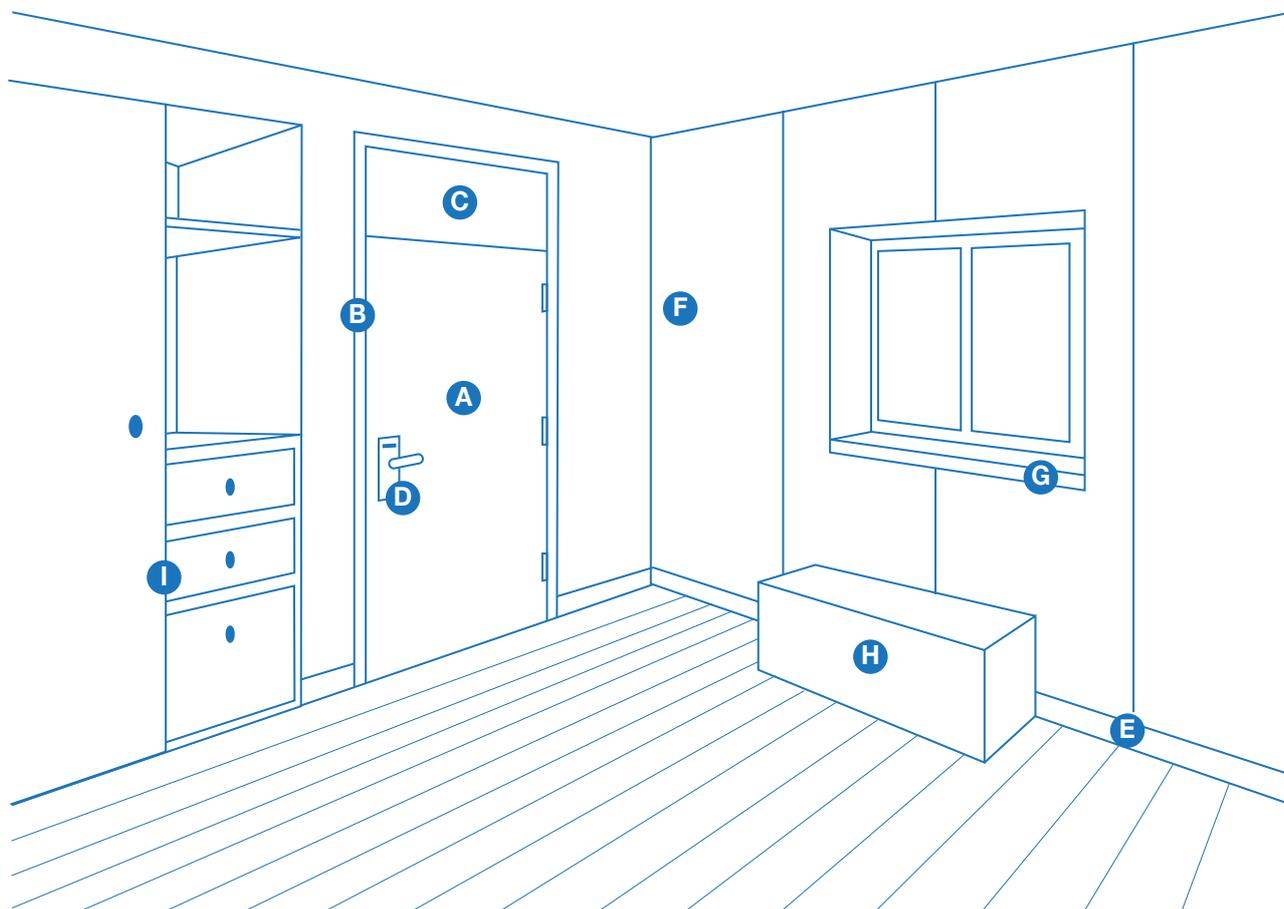

A DOOR LEAF

Individual door leaves and pairs in veneer, laminate and foil finish. Fire and non-fire, glazed and un-glazed.

B DOOR KITS & DOOR SETS

Matching door, frame and architrave pre-machined and supplied with components for on-site assembly.

C OVERPANELS

Manufactured to match the door in terms of colour and performance.

D ELECTRONIC LOCKS

Especially developed for Hotel & Leisure applications.

E SKIRTING

Available in various profiles to match Portaro® and Easi-Fit.

F WALL PANELS

Part of the Vicaima Bespoke Range, ask our technical department for details.

G WINDOW BOARD

Window boards available in rounded or square profile to match Vicaima door finishes.

H FURNITURE

Part of the Vicaima Bespoke Range, ask our technical department for details.

I WARDROBE DOORS & INTERIORS

Matching doors and choice of interior layouts.

PROJECT SOLUTIONS

DESIGN & INNOVATION



VISIT OUR WEBSITE



Vicaima Ltd

Drakes Way Business Centre
Marlowe Avenue. Greenbridge Ind. Est.
Swindon. Wiltshire SN3 3JF
Fax: 01793 530193

01793 532333
info@vicaima.com
www.vicaima.com

